



FIM 75 ICE MACHINE

68 KG SELF-CONTAINED ICE CUBER



INSTRUCTION MANUAL


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

TECHNICAL FEATURES

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R134a

24 HOUR ICE PRODUCTION - 10°C/10°C

Air cooled 65 kg - N° of cubes 3250
Water cooled 68 kg - N° of cubes 3400

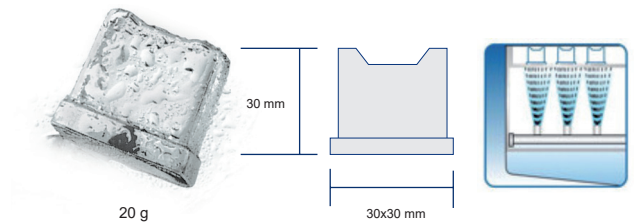

BIN CAPACITY


kg 33

WARRANTY

3 years warranty on components

VOLTAGE

230/50/1 standard version
220-240/60/1 version available on demand

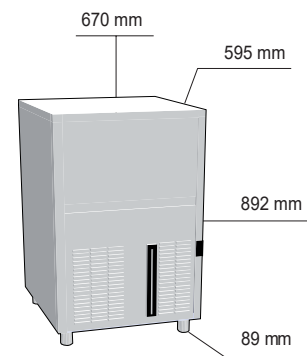


TECHNOLOGY AND CERTIFICATION



Certified ISO 9001



Other models in this range: SCN25 - SCN35 - SCN45 - SCN125 - SCN215

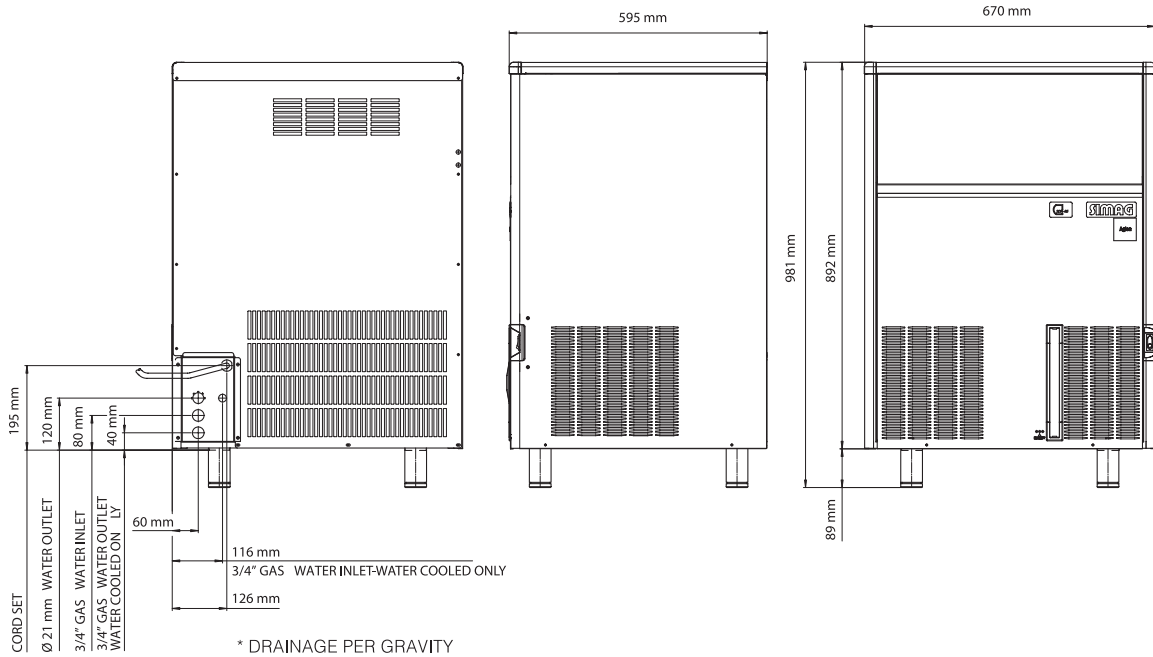

OPERATING LIMITS

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi	70 psi
	1 bar	5 bar



CONTROL BOARD



CLEANING SYSTEM
Easy cleaning of water pump filter



MAIN SWITCH
New embedded main switch



TOP ANGLE
New top plastic round corners



VENTILATING GRILLE
New ventilating grille in water cooled version



AIR FILTER
New condenser air filter for air cooled version

SPECIFICATIONS AND DESIGN ARE SUBJECT TO CHANGE WITHOUT NOTICE

Model	Voltage	Power input Watt (*)	Refrigerant type	Refrigerant charge kg	Fuse AMP	Water consumption l/h (**)	Net weight kg	Shipping weight kg
SCN 75 AS	230/50/1	670	R134a	0.5	10	9	63	74
SCN 75 AS	220-240/60/1	670	R134a	0.5	10	9	63	74
SCN 75 WS	230/50/1	520	R134a	0.38	10	41	63	74
SCN 75 WS	220-240/60/1	520	R134a	0.38	10	41	63	74

05-2018

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water