



FIM128 ICE MACHINE

137 KG SELF-CONTAINED ICE CUBER



INSTRUCTION MANUAL


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

TECHNICAL FEATURES

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R404A

24 HOUR ICE PRODUCTION - 10°C/10°C

Air cooled	135 kg - N° of cubes 6750
Water cooled	137 kg - N° of cubes 6850

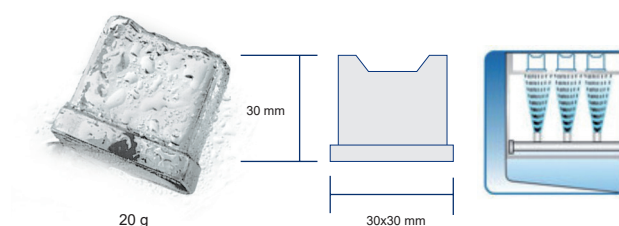

BIN CAPACITY


kg 50

WARRANTY

3 years warranty on components

VOLTAGE

230/50/1 standard version
 220-240/60/1 version available on demand

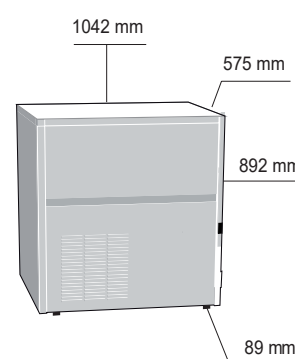


TECHNOLOGY AND CERTIFICATION



Certified ISO 9001



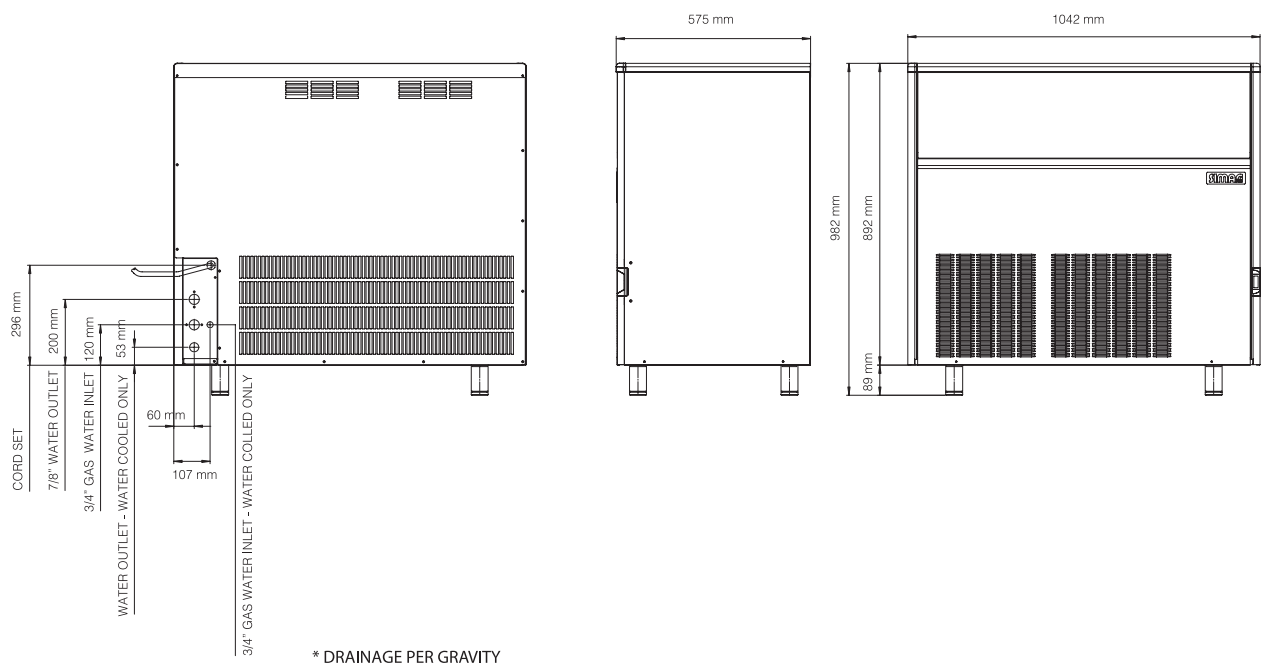

OPERATING LIMITS

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi	70 psi
	1 bar	5 bar



CONTROL BOARD



MAIN SWITCH
New embedded main switch



VENTILATING GRILLE
New ventilating grille in water cooled version



CLEANING SYSTEM
Easy cleaning of water pump filter



TOP ANGLE
New top plastic round corners



AIR FILTER
New condenser air filter for air cooled version

SPECIFICATIONS AND DESIGN ARE SUBJECT TO CHANGE WITHOUT NOTICE

Model	Voltage	Power input Watt (*)	Refrigerant type	Refrigerant charge kg	Fuse AMP	Water consumption l/h (**)	Net weight kg	Shipping weight kg
SCN 125 AS	230/50/1	1200	R404A	0.63	16	20.8	97	110
SCN 125 AS	220-240/60/1	1200	R404A	0.63	16	20.8	97	110
SCN 125 WS	230/50/1	1200	R404A	0.63	16	n.a	97	110
SCN 125 WS	220-240/60/1	1200	R404A	0.63	16	n.a	97	110

05-2018

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water